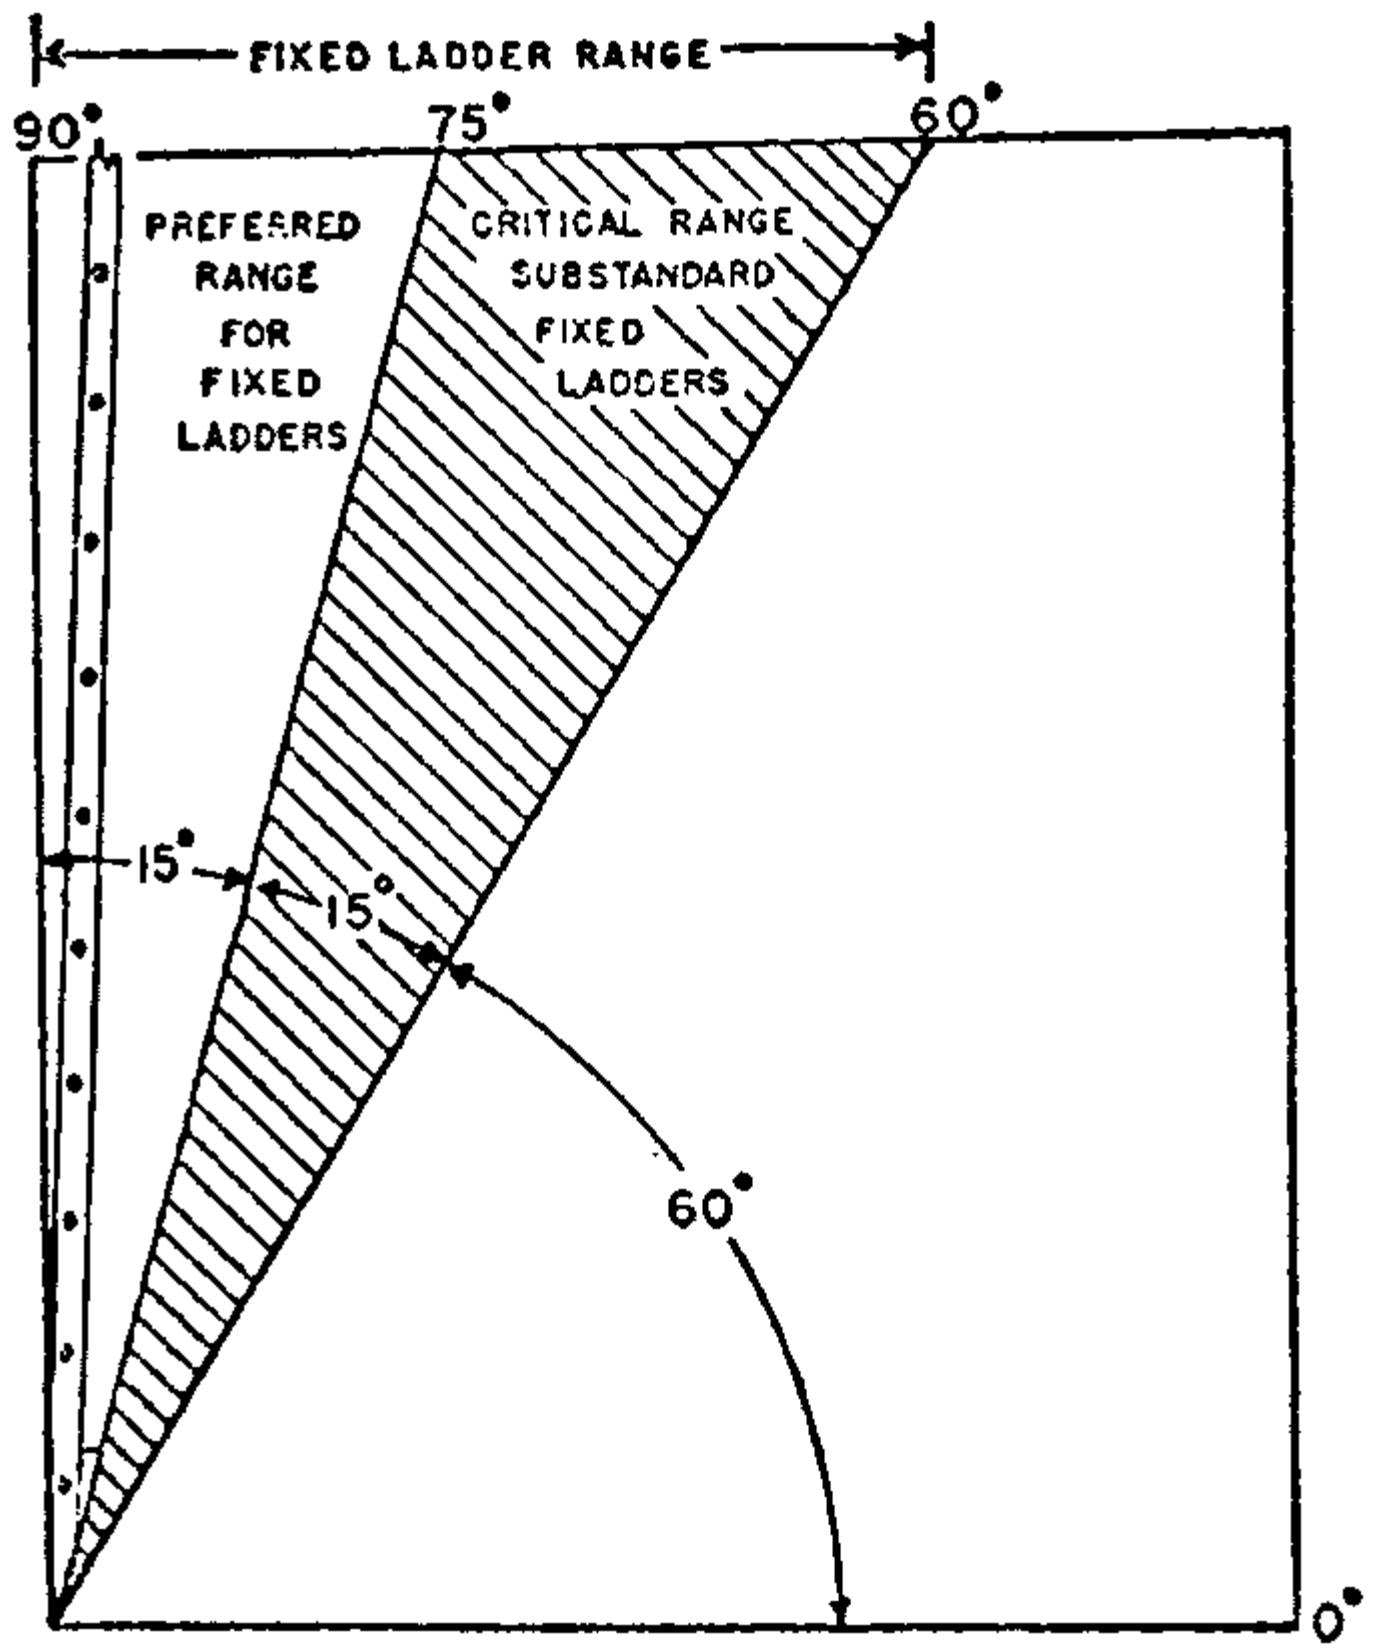
FIXED LADDER RANGE
90°
75°
60°
PREFERRED RANGE FOR FIXED LADDERS
CRITICAL RANGE SUBSTANDARD FIXED LADDERS
15°
15°
60°
0°