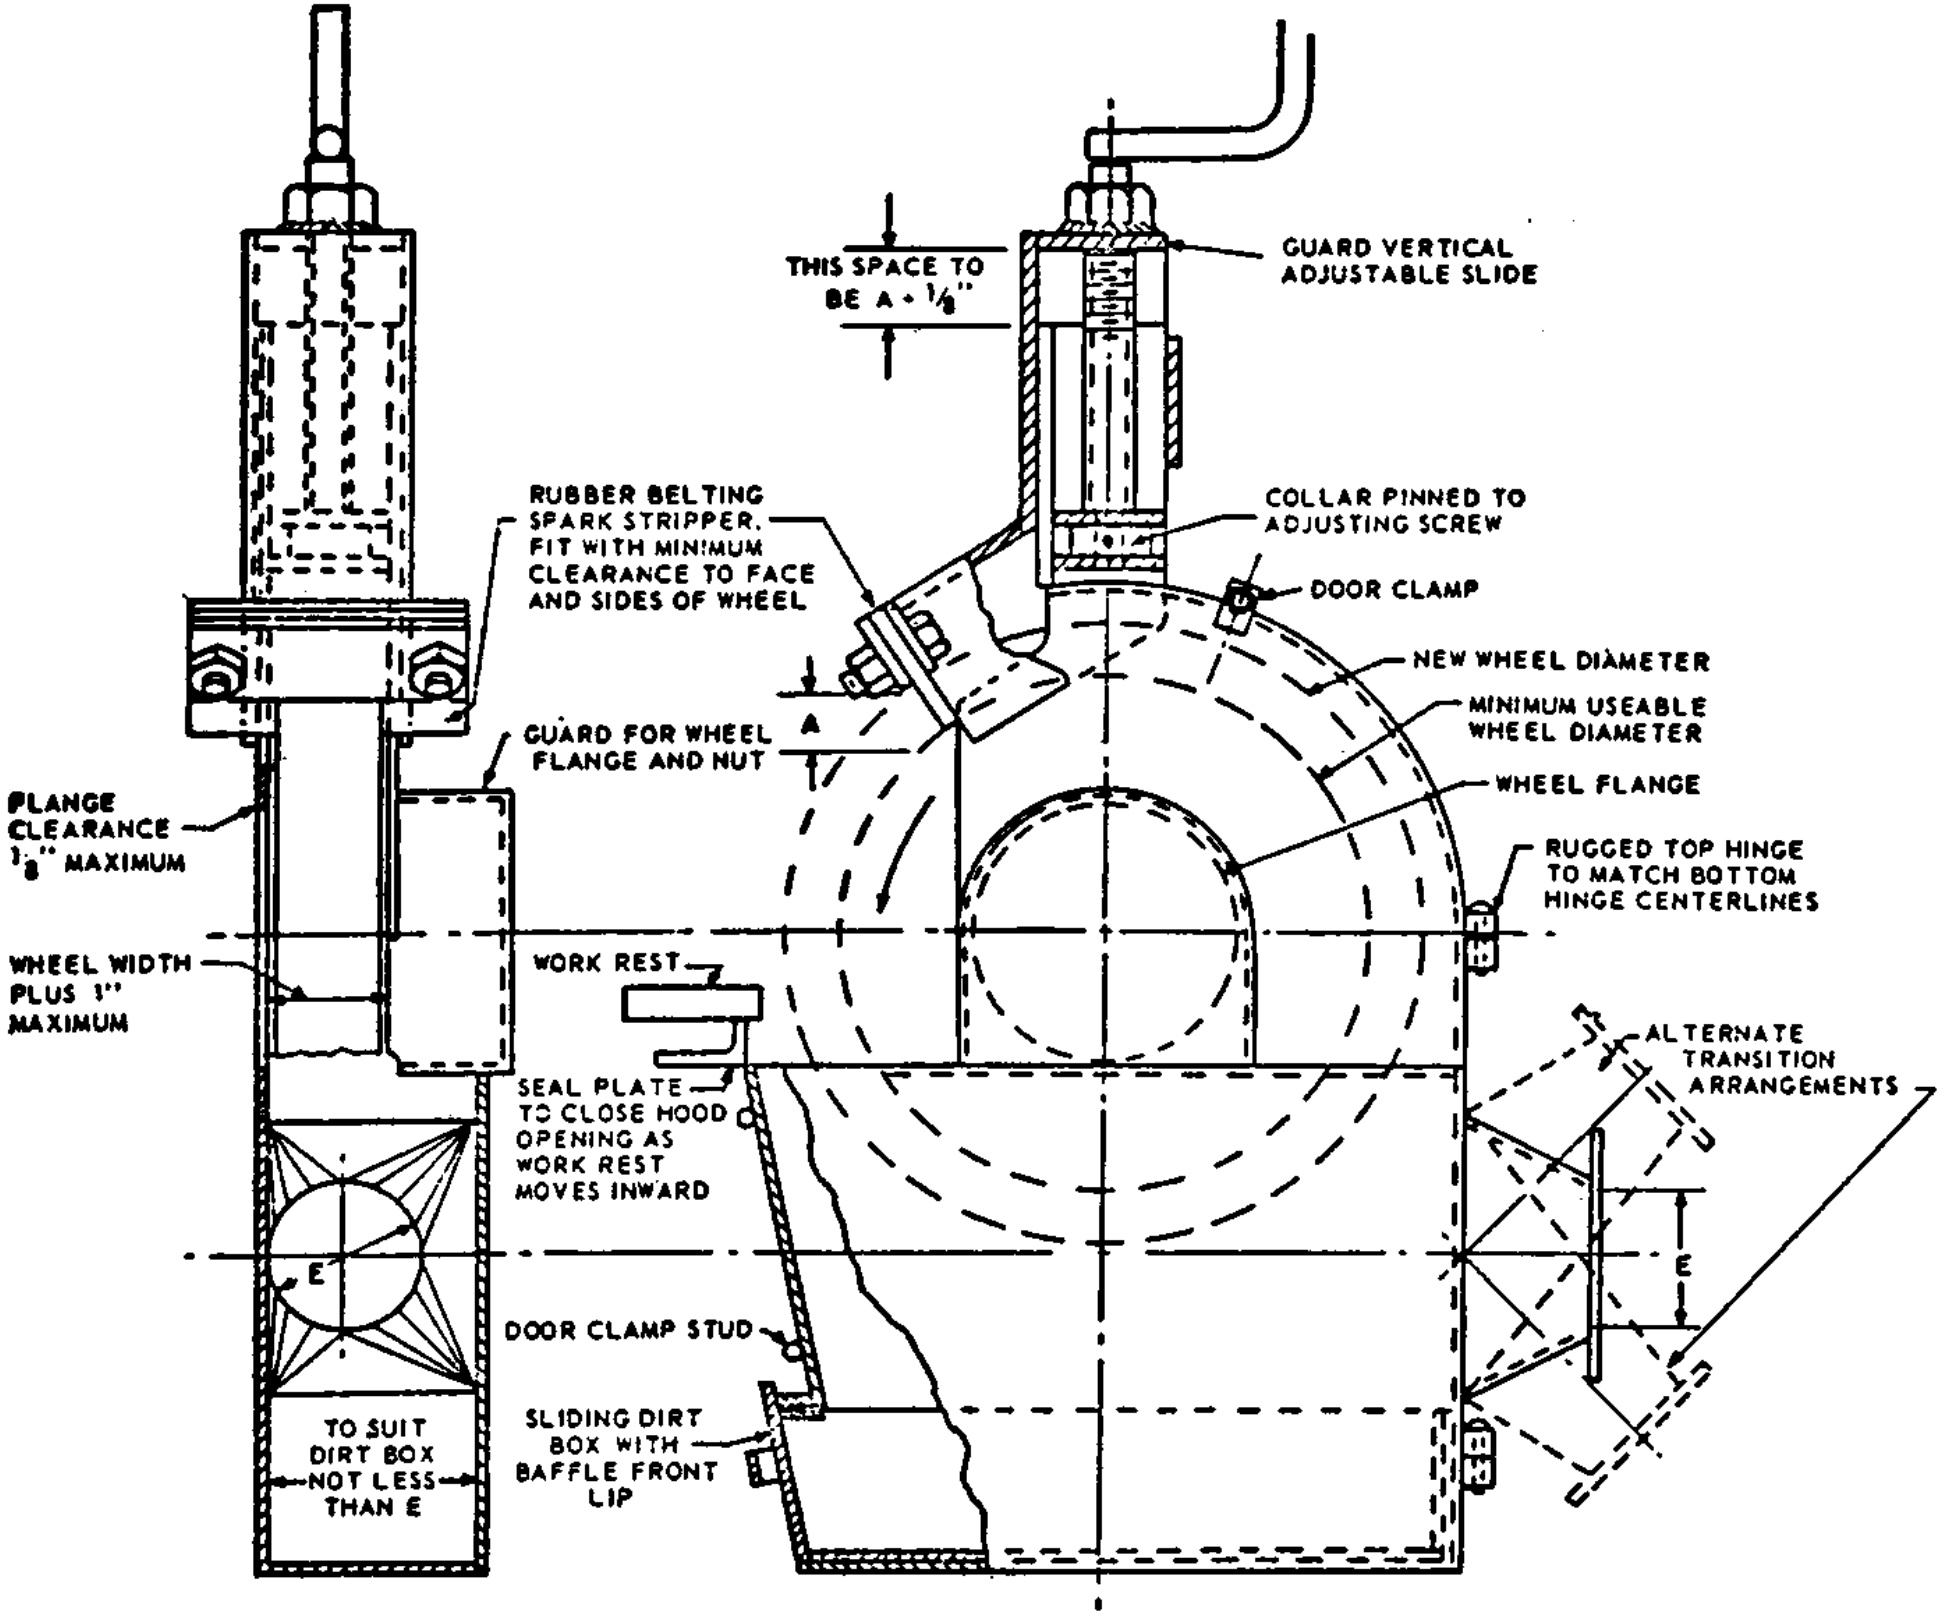
THIS SPACE TO BE A + 1/8"
GUARD VERTICAL ADJUSTABLE SLIDE
RUBBER BELTING SPARK STRIPPER. FIT WITH MINIMUM CLEARANCE TO FACE AND SIDES OF WHEEL
COLLAR PINNED TO ADJUSTING SCREW
DOOR CLAMP
NEW WHEEL DIAMETER
MINIMUM USEABLE WHEEL DIAMETER
A
GUARD FOR WHEEL FLANGE AND NUT
WHEEL FLANGE
FLANGE CLEARANCE 1/8" MAXIMUM
RUGGED TOP HINGE TO MATCH BOTTOM HINGE CENTERLINES
WHEEL WIDTH PLUS 1" MAXIMUM
WORK REST
ALTERNATE TRANSITION ARRANGEMENTS
SEAL PLATE TO CLOSE HOOD OPENING AS WORK REST MOVES INWARD
E
E
DOOR CLAMP STUD
SLIDING DIRT BOX WITH BAFFLE FRONT LIP
TO SUIT DIRT BOX NOT LESS THAN E