



FIGURE 2 CABLE ATTACHMENT DEVICES


HOLLOW TILE OR METAL LATH

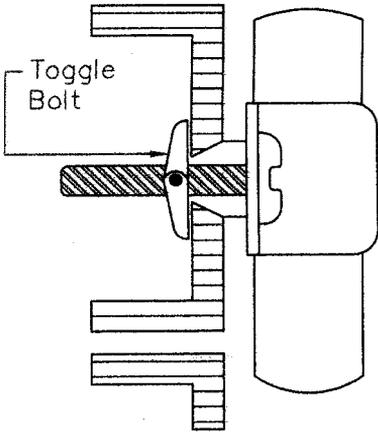


LATH AND PLASTER OR PLASTER BOARD

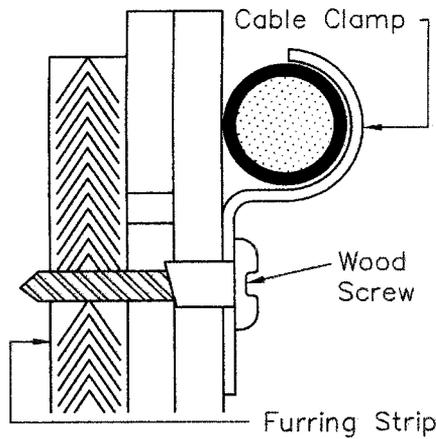

RIGID COMPOSITION SHINGLE

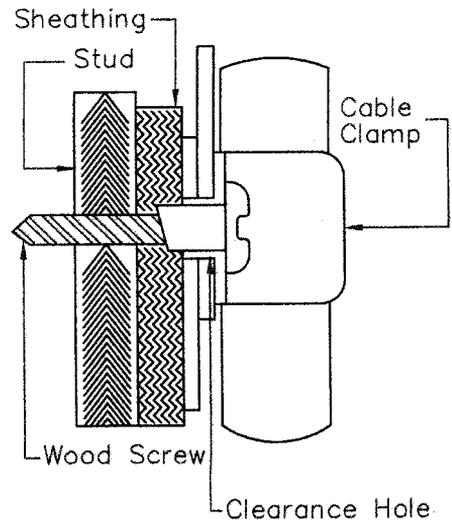


CONCRETE BLOCK

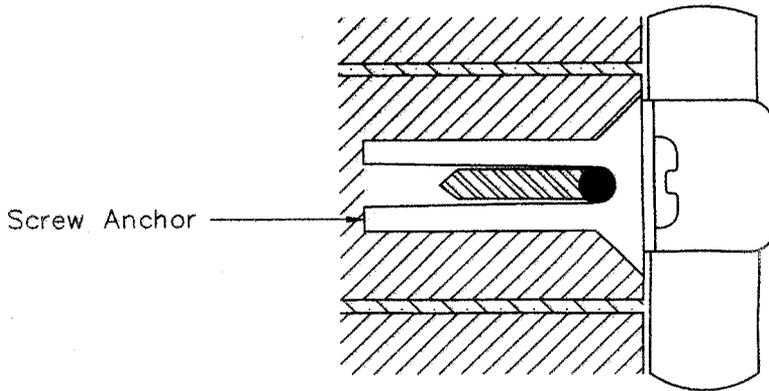

Drill hole in concrete block with a twist drill of the outside diameter indicated on the expansion shield. Then insert anchor in hole and expand by turning screw.

MASONRY-FINISHED SURFACE

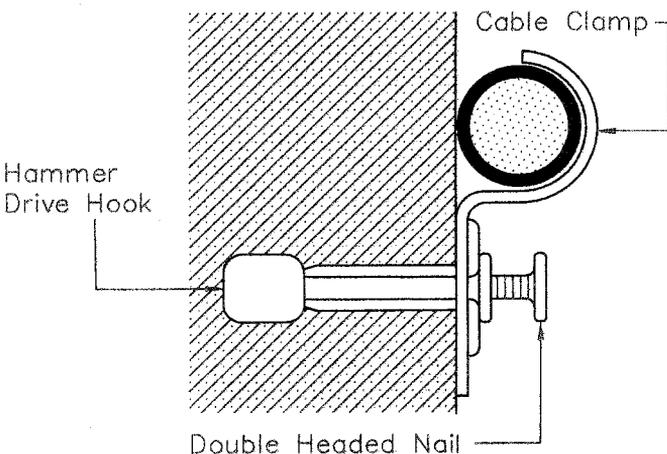

PLASTER ON CINDER BLOCK

