
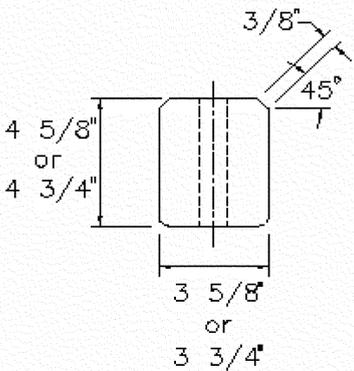
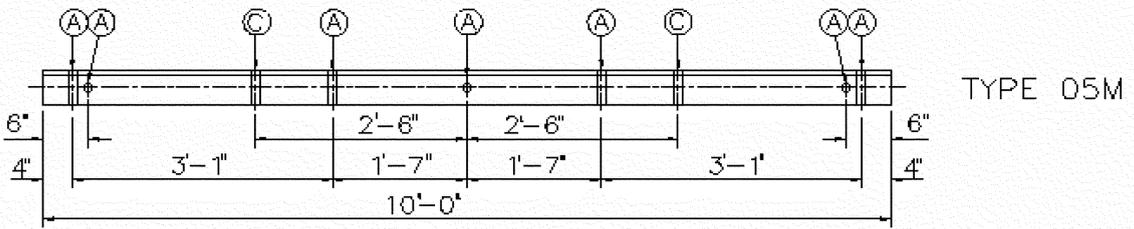


TOLERANCES AND SIZES OF HOLES

	NOMINAL	GO	NO GO
(A)	11/16"	5/8"	3/4"
(B)	7/16"	3/8"	1/2"
(C)	9/16"	1/2"	5/8"

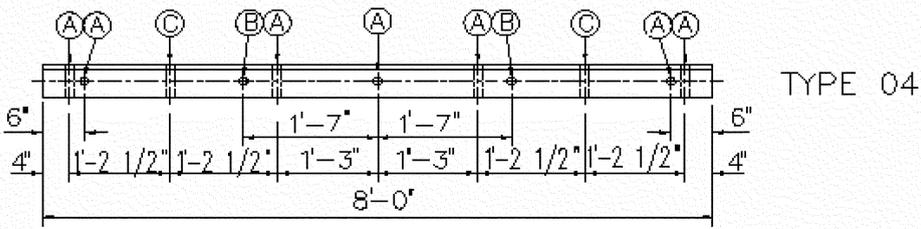

TYPICAL END SECTION

NOTES:

1. Holes are to be located within  $\pm 1/8"$
2. Length of the crossarm is to be within  $\pm 1/4"$
3. The tolerance of any cross section is  $+1/8"$  and  $-0"$  at time of manufacture.
4. All holes are to be drilled on centerlines of crossarm faces.

DISTRIBUTION CROSSARM DRILLING GUIDE

JUNE 2009		W2.1G
RUS		(Old M-19)