


Notes:

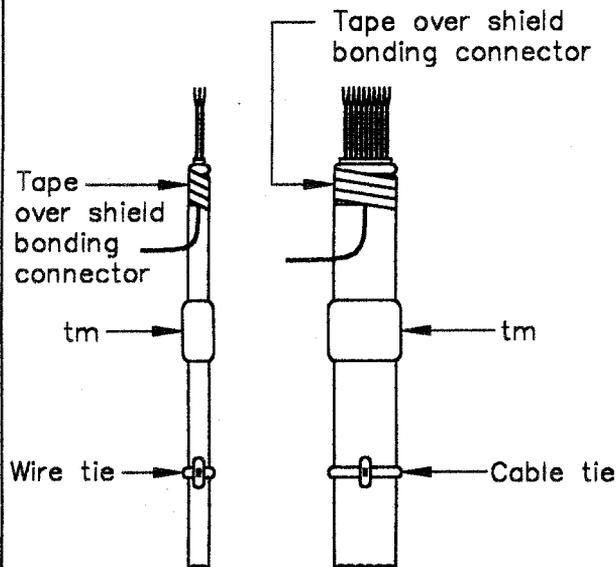

- ① Markers shall be installed on all buried wires and cables at each housing as shown in 7 CFR 1755.200.
- ② The marker shall be wrapped around the cable in a manner such that the printed portion of the marker is completely covered and protected by at least one layer of transparent tape. On cables too large for this to be accomplished with a single marker, a second marker shall be applied so that the clear tape of the second marker provides protection for the printed portion of the first. The information shall be legibly printed and shall be readily visible.

- ③ The markers shall contain the following information unless indicated otherwise by the Borrower or Borrower's Engineer.

Buried Service Wire:


Line 1 – Subscribers identification
(Such as: name, telephone number, or address)

Buried Cable or Wire:


Line 1 – Nearest sequential marking
Line 2 – Direction of cable or wire
Line 3 – Cable reel number
Line 4 – Name of cable manufacturer

- ④ Other methods or materials of directional marking may be used when specified by the Borrower or the Borrower's Engineer.

Buried Service Wire Marker

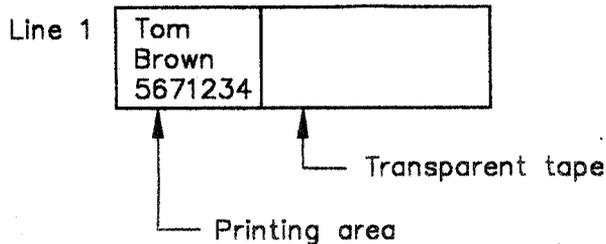

Buried Cable Marker

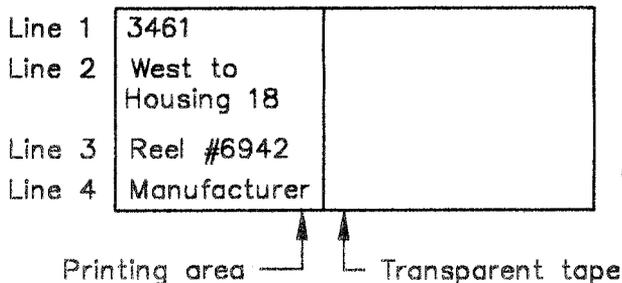

ITEM	MATERIAL	NO. REQ'D
*tm	Tape, marker	as required
RURAL TELECOMMUNICATIONS CONSTRUCTION PRACTICES BURIED CABLE AND WIRE DIRECTIONAL MARKING		
Scale: NTS		March 2001
		958