


FIGURE L-12. 10-MICRON NOZZLE ENTRY SECTION

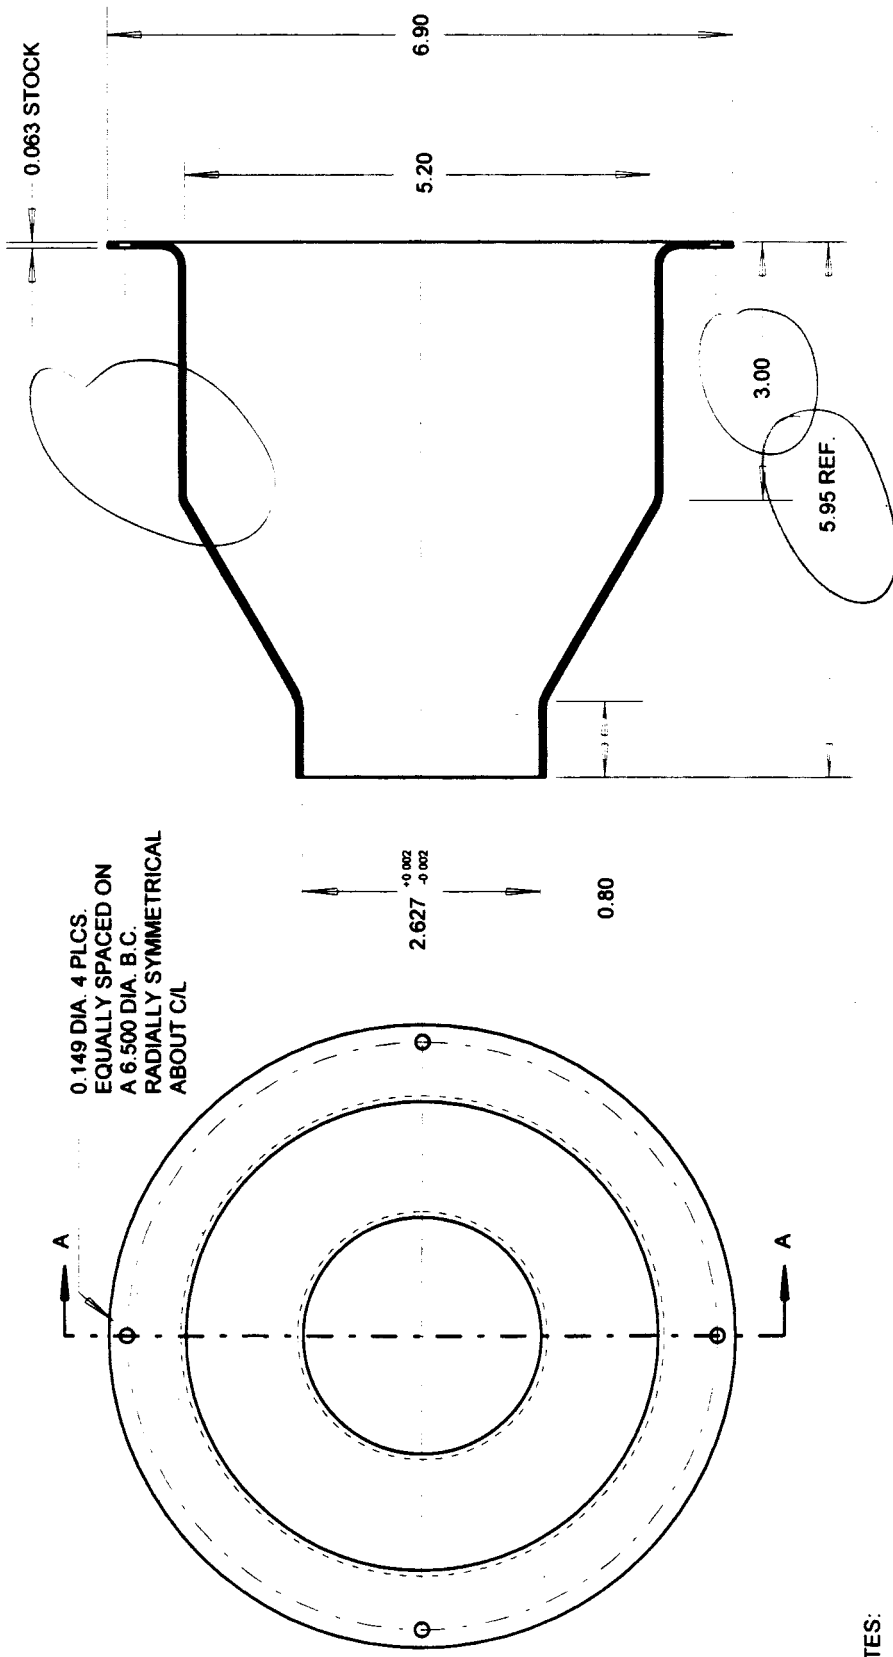

NOTES:

- (1) BEND RADIUS TO BE MINIMUM PER COMMERCIAL SPINNING STANDARDS
- (2) BREAK ALL SHARP EDGES
- (3) MATERIAL IS SPUN ALUMINUM 6061-T0, POST-HEAT TREATED TO -T4
- (4) CLEAR ANODIZE

TOLERANCES			
2 PLCS	3 PLCS	FRAC	ANGLE
+/- 0.010	+/- 0.005	+/- 1/64	+/- .1°

ALL DIMENSIONS ARE INCHES