


MAXIMUM VERTICAL GUY, TIE OR BRACE SPACING 3'- 0" AND NARROWER BASES

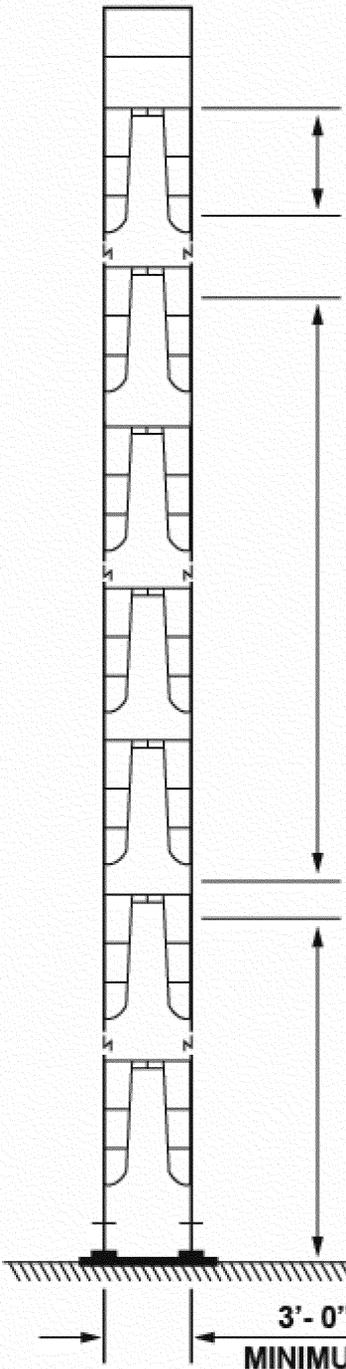

Attach top guy, tie or brace where a horizontal member supports inner and outer legs and is no further down than the 4 to 1 height from top of completed scaffold.

Attach intermediate guys, ties or braces repeatedly where a horizontal member supports inner and outer legs and where it is no more than 20'- 0" up from the next lower attachment location.

Attach lowest guy, tie or brace where a horizontal member supports inner and outer legs and is **closest** to the 4 to 1 height, **whether above or below the exact height.**

3'- 0" AND NARROWER
MINIMUM BASE DIMENSION